Lumitex Linear Fitting

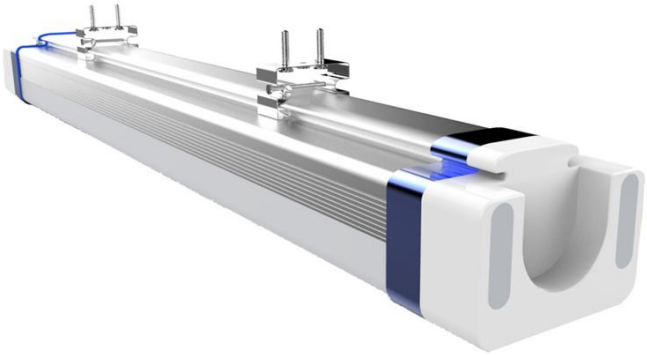

Lumitex Linear Fitting

High quality, surface mounted solid state lighting option to replace fluorescent fittings in tunnels, warehouses, factories, production lines, supermarkets, retail environments and other commercial applications.

Lumitex linear LED fittings are IP66 rated for use outdoor or indoor, with excellent, uniform diffused output. Individual chips cannot be seen, which offers lower glare and seamless appearance.

Daisy-chain connection option is offered for fast, efficient installation in surface mounted environments.

IP66

WIDE BEAM

W www.lumitex.com.au P 1300 337 809 P 08 9250 4178 F 08 9463 1464

Lumitex Linear Fitting

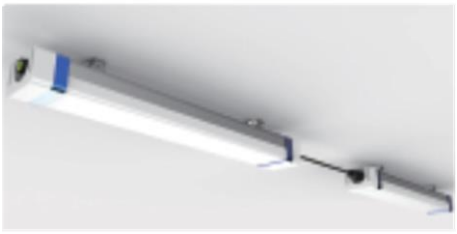

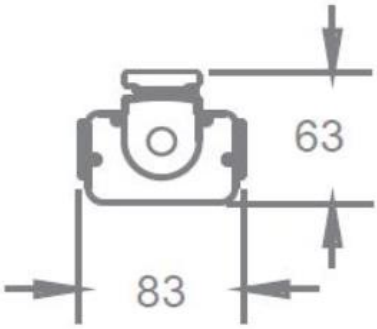

Product Number Example

LUM LF 600 5K 40 L

LF- Family = LinearFitting
600- Length = 600mm
5K- Colour (CCT) = 5000
40- Wattage = 40
L- Additional options = Linkable

Features:

- Uniform, diffused light. No visible chips.
- Daisy chain option for rapid and flexible installation
- High luminous output options
- Sleek, modern design
- Low maintenance
- Strong, solid design
- Low glare
- No UV, no Mercury
- Instant on
- No flicker

Specifications:

- Input: 110V - 240VAC
- Power factor: >0.93
- CRI: >80
- IP66 - dust and water proof
- IK10 impact resistance

Options/Accessories:

- W= 83mm, H=63mm
- Wattage: 20W, 40W, 50W, 65W
- CCT:3000K, 4000K, 5000K
- linkable options available
- Microwave sensor options available

PartNumber	Lumens	Length	Colour (CCT)	Wattage	Additional options
LUMLF6005K20L	2400	600mm	5000	20	Linkable
LUMLF6005K20	2400	600mm	5000	20	N/A
LUMLF12004K40L	4800	1200mm	4000	40	Linkable
LUMLF12004K40	4800	1200mm	4000	40	N/A
LUMLF12005K40L	4800	1200mm	5000	40	Linkable
LUMLF12005K40	4800	1200mm	5000	40	N/A
LUMLF15005K65	7800	1500mm	5000	65	N/A