

Lumitex Polycarbonate Weatherproof Data Sheet





LUMPC12004K2

Specifications

- Input Voltage: 110V - 240VAC
- Beam Angle: 120°
- Ingress Protection rating: IP65
- CRI: 80+
- Warranty: 3 Years
- Power factor: >0.9
- Not dimmable
- Vandal resistant
- Fixings included
- Instant on
- Low heat emission
- 4-terminal fuse block
- Frosted diffuser - No visible chips
- Uniform light output
- Lumitex LED tubes included
- One for one replacement of similar style fluorescent fittings
- Long life rating
- Low energy consumption

LUMPC12004K2 Model Shown

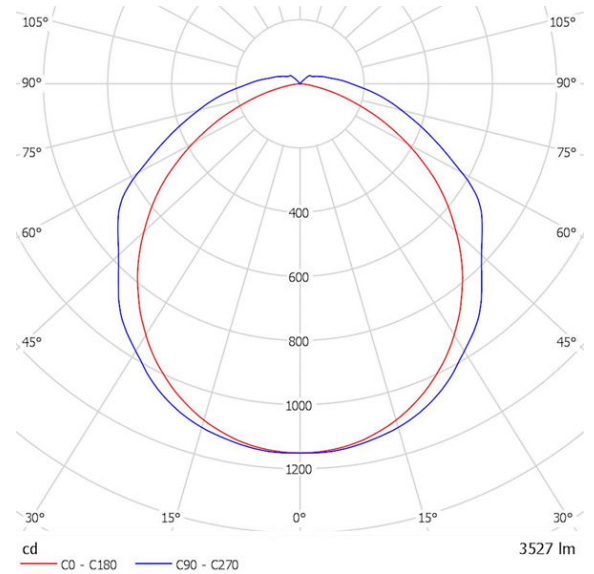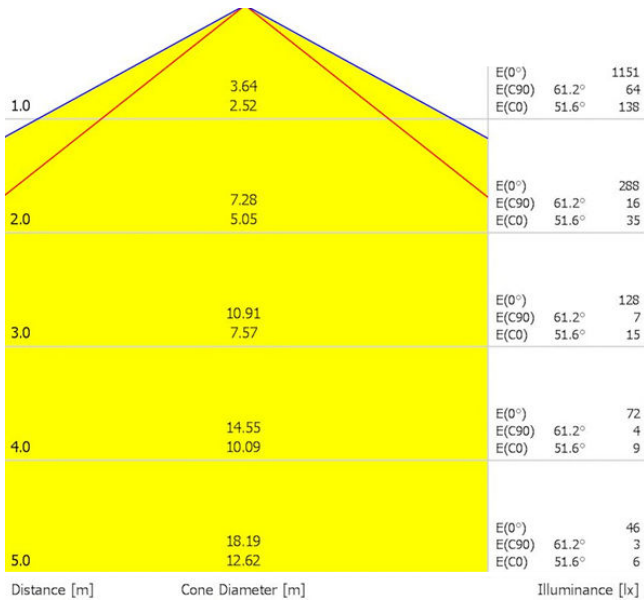

Part Number Legend

Length	#	CCT	#	Tube Quantity	#
600MM	600	4000K	4K	1 Tube	1
1200MM	1200			2 Tubes	2



Product	Consumption (watts)	Dimensions	Weight	Colour Temperature	Lumen Output
LUMPC6004K1	10W	A=100MM, B=670MM, C=95MM	1.2KG	4000K version available only	890LM
LUMPC6004K2	20W	A=100MM, B=670MM, C=150MM	1.8KG	4000K version available only	1,760LM
LUMPC12004K1	20W	A=100MM, B=250MM, C=95MM	2.2KG	4000K version available only	1,710LM
LUMPC12004K2	40W	A=100MM, B=1250MM, C=145MM	3.1KG	4000K version available only	3,520LM