




## Gulberg Linear



The high-performance specification-grade Gulberg Linear light is designed to meet the specific needs of commercial, institutional buildings, and architectural lighting requirements. Can be customised to specific lengths up to 3metres.



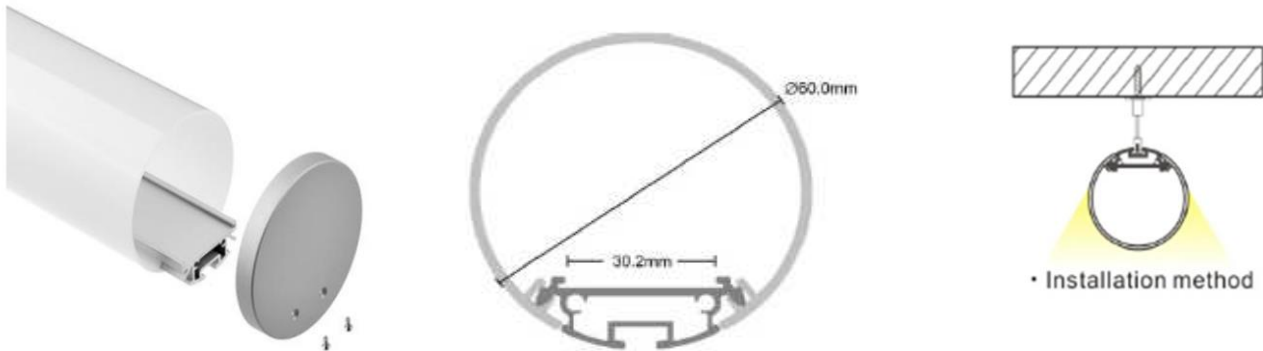

## Features:

- No flickering, visual comfort
- Optimal glare control
- Wide beam angle distribution
- Customisable to suit the application

## Specifications:

- Voltage Input: 220-240VAC
- 15 w/lm SMD2835 160 LED's
- Fits PCB width 30mm
- Power Factor: >0.90
- CRI: >90
- Efficacy: 108Lm/w
- Diameter: Ø60mm
- IP Rating: IP20
- Dimmable: Dimming option available
- Remote mounted driver

## Options:

- Dimming options:  
-0-10V and DALI dimming
- 120mm diameter - fit PCB width 60mm
- CCT: 3000K, 5000K
- Wattages: Available upon request.

Part Number	Wattage	Lumens (Lm)	Colour (CCT)	Product Dimensions (mm)	CRI
LUML233004540	45	4887	4000K	Ø60 x 3000mm	90
LUML233009040	90	9774	4000K	Ø60 x 3000mm	90