



BALANCE



A quality LED highbay offering a sleek and intelligent design. The heart of this system utilises award winning Lumileds as the LED light source, driven by dependable brand electronics.

This combination produces the required punch to exceed performance expectations in replacing any traditional highbay light fitting, with 1 for 1 replacement options to 1000W.

It can be quickly converted to a smart LED high bay by plugging sensor options directly into the fitting.



Ideal for applications where a dependable and energy-efficient workhorse is the primary criteria.



IK08

IP65

5
Year
Warranty

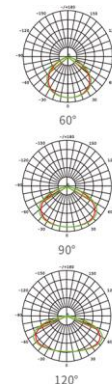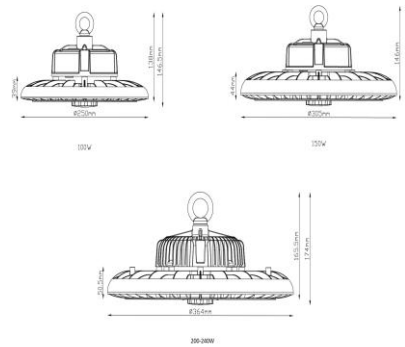

Features:

- Quality Construction
- Lumileds High Efficacy Chipset
- Smart Conversion Made Easy
- Easy Installation
- No UV or IR Radiation
- Comes with Eye Bolt for Suspension

Specifications:

- Voltage Input: 200-240VAC
- Power Factor: ≥ 0.95
- Efficacy: ≥ 190 Lm/W
- CRI: ≥ 70
- Operating Temp: -25° to $+50^{\circ}\text{C}$
- Ingress Protection: IP65
- Impact Rating: IK08
- Dimmable: via optional plug-in module
- Warranty: 5 Years

Options:

Please Contact Lumitex for More Information.

- Colour Temperature (CCT):
 - 3000K
- Beam Angles:
 - 60° , 120°
- PC Refractor 82° or with Refractor and Lid 97°
- DALI Dimmable
- Bracket
- Control Options:
 - Microwave Motion Sensor/Dimming Options

Part Number	Wattage	Colour (CCT)	Beam Angle	CRI	Dimensions
LUMH271S200S1	100/150/200W Selectable	3000/4000/5000K Selectable	60°	70	$\Phi 364 \times 196$
LUMH271S200S2	100/150/200W Selectable	3000/4000/5000K Selectable	90°	70	$\Phi 364 \times 196$
LUMH271S200S3	100/150/200W Selectable	3000/4000/5000K Selectable	120°	70	$\Phi 364 \times 196$