



VALLUM






Vallum is an angular looking wall light built to deliver on all fronts. Its multiple power levels, high efficacy LED's providing wide spacing and asymmetric distribution provides great light coverage.

A wall pack light fitting that offers IP66 and IK08 ratings and 2 sized footprints in a smart Silver powder coated finish. Can be turned upside down for uplighter. Power needs to be derated if orientated upwards to protect thermal management.

IK08

IP66

5
Year
Warranty

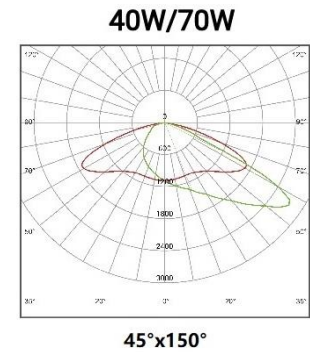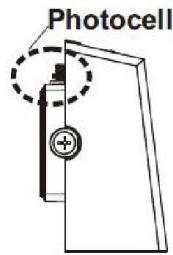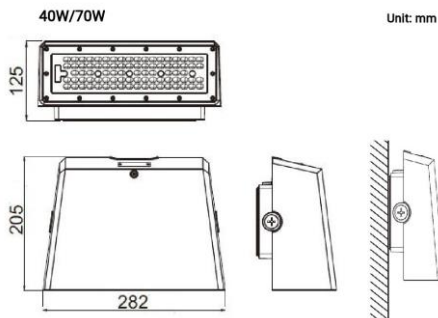

Features:

- Durable Cast-Aluminium Fixture
- High Luminous Efficacy
- Slim Design
- Full Cut-Off Asymmetric Beam Angle
- Dark Sky Friendly
- 5 Years Warranty

Specifications:

- Voltage: 220-240VAC 50/60Hz
- Operating Temperature: -30°C to +45°C
- Power Factor: ≥ 0.90
- Efficacy: 145lm/W
- Beam Angle: 45°x150°
- CRI: ≥ 70
- CCT: 4000K
- Ingress Protection: IP66
- Impact Rating: IK08
- Optical Lens: Polycarbonate (PC)
- Surge protection: 4KV line-line, 6KV line-earth
- Fixture Colour: Silver (RAL9006)
- Category of Corrosion: C3
- Finish: Powder Coating

Options:

- Wattages: 40W/70W
- Colour Temperature (CCT):
 - 3000K/5000K
- Intelligent Control:
 - Photocell (Daylight Sensor)
- Fixture Colour: Grey/White

Part Number	Wattage	Colour (CCT)	Beam Angle	Lumens (lm)	Dimensions (mm)	Option(s)
LUMY30404S	40	4000	45°x150°	5,800	282x205x125	-
LUMY30704S	70	4000	45°x150°	9,100	282x205x125	-
LUMY30705SP	70	5000	45°x150°	9,100	282x205x125	Photocell